




4. Hatches & Portlights


Stainless Steel Portlight

With its highly polished stainless outer frame, the Stainless Portlight will really shine on your boat. The handles and hinge system were designed to leave the lens clear of obstructions, giving it an uncluttered view and a clean, modern look.


- ABS Plastic Trim
- Can be installed with sealant or closed cell PVC tape
- Trim with clean styling
- Easily fitted by clamping the cabin sides between inner and outer frame with screws provided that are fastened into the outer frame
- Full range of spare parts available on-line www.lewmar.com

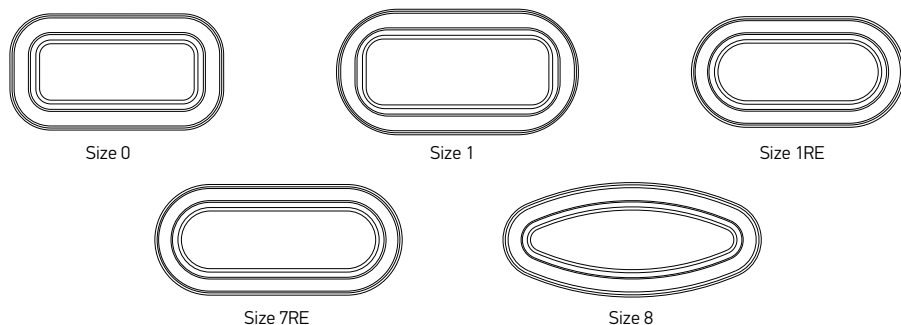

Stainless steel Portlight Dimensions



Stainless steel Portlight Cut-out



Specifications options:

- Handles: clip (standard) / twist (option)
- Moulding colour Grey
- Acrylic colour: Grey (standard) other colour optional
- Frame colour: Stainless steel
- Comes complete with trim and flyscreen

PART NUMBER	Size	TRIM COLOUR	VERSION	OVERALL DIMENSIONS								CUT-OUT DIMENSIONS						PORTLIGHT WEIGHT		ACRYLIC WINDOW THICKNESS	
				X LENGTH		Y WIDTH		Z HEIGHT		R RADII		X1 LENGTH		Y1 WIDTH		R1 RADII					
				mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lb	mm	in
393020262	0	WHITE	OPENING	176	6 15/16	323	12 11/16	4	5/32	62.0	2 7/16	156	6 1/8	303	12	52.0	2 1/16	1.5	3.30	8	1/2
393010262	0	WHITE	FIXED	176	6 15/16	323	12 11/16	4	5/32	62.0	2 7/16	156	6 1/8	303	12	52.0	2 1/16	1.5	3.30	10	3/8
393120262	1	WHITE	OPENING	191	7 1/2	367	14 7/16	4	5/32	62.0	2 7/16	171	6 3/4	347	13 5/8	52.0	2 1/16	1.7	3.80	8	1/2
393110262	1	WHITE	FIXED	191	7 1/2	367	14 7/16	4	5/32	62.0	2 7/16	171	6 3/4	347	13 5/8	52.0	2 1/16	1.7	3.80	10	3/8
393180262	1RE	WHITE	OPENING	191	7 1/2	367	14 7/16	4	5/32	95.5	3 3/4	171	6 3/4	347	13 5/8	85.5	3 3/8	1.7	3.74	10	3/8
393170262	1RE	WHITE	FIXED	191	7 1/2	367	14 7/16	4	5/32	95.5	3 3/4	171	6 3/4	347	13 5/8	85.5	3 3/8	1.7	3.74	10	3/8
393780262	7RE	WHITE	OPENING	191	7 1/2	425	16 3/4	4	5/32	95.5	3 3/4	171	6 3/4	405	15 15/16	85.5	3 3/8	1.9	4.18	10	3/8
393770262	7RE	WHITE	FIXED	191	7 1/2	425	16 3/4	4	5/32	95.5	3 3/4	171	6 3/4	405	15 15/16	85.5	3 3/8	1.9	4.18	10	3/8
393820862	8	CHROME	OPENING	196	7 11/16	452	17 13/16	4	5/32	N/A	N/A	SEE DRAWING ON WEBSITE				1.9	4.18	10	3/8		
393810862	8	CHROME	FIXED	196	7 11/16	452	17 13/16	4	5/32	N/A	N/A	SEE DRAWING ON WEBSITE				1.9	4.18	10	3/8		

Maximum hull thickness 30mm
Minimum hull thickness 9mm

All portlights are supplied with M5 x 20 screws for hull thickness 12-17mm
Portlights should be fitted to a flat surface +/-1mm




4. Hatches & Portlights

Standard Portlight

A perfect match for any hatch in the Lewmar range, the Standard Portlight is stylish, competitively priced and easy to both use and install.

- Easily fitted by clamping the cabin sides between inner and outer frame with screws provided that are fastened into the outer frame
- Can be installed with sealant or closed cell PVC tape
- White ABS Plastic Trim
- Cut out shape available from www.lewmar.com
- Supplied complete with flyscreen (except sizes 4L and 4R)
- Full range of spare parts available on-line www.lewmar.com

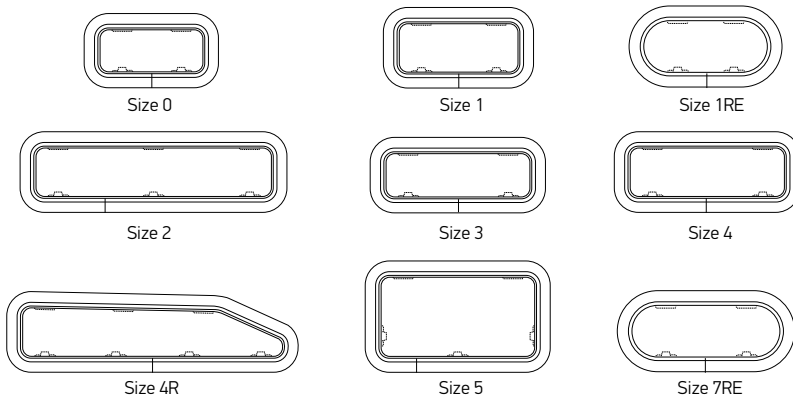


Optional twist handle, contact your Lewmar representative for part numbers

Specifications options:

- Handles: clip (standard) / twist (option)
- Moulding colour Grey
- Acrylic colour: Grey (standard) other colours optional
- Frame colour: Silver anodized (standard) other finishes available
- Come complete with trim and flyscreen

Standard Portlight Dimensions

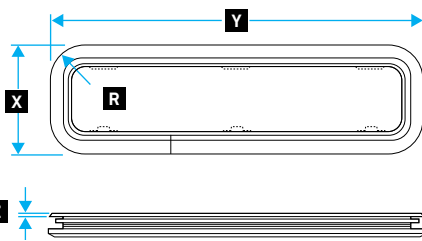

Standard Portlight Cut-out



PART NUMBER	SIZE	OVERALL DIMENSIONS								CUT-OUT DIMENSIONS						PORTLIGHT WEIGHT		ACRYLIC WINDOW THICKNESS	
		X LENGTH		Y WIDTH		Z HEIGHT	R RADII		X1 LENGTH		Y1 WIDTH		R1 RADII						
		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lb	mm	in
393020200	0	176	6 15/16	323	12 11/16	4	5/32	62.0	2 7/16	156	6 1/8	303	11 15/16	52.0	2 1/16	1.1	2.42	6	1/4
393120200	1	191	7 1/2	367	14 7/16	4	5/32	62.0	2 7/16	171	6 3/4	347	13 11/16	52.0	2 1/16	1.3	2.86	6	1/4
393180200	1RE	191	7 1/2	367	14 7/16	4	5/32	95.5	3 3/4	171	6 3/4	347	13 11/16	85.5	3 3/8	1.3	2.86	8	5/16
393220200	2	176	6 15/16	425	16 3/4	4	5/32	62.0	2 7/16	156	6 1/8	405	15 5/16	52.0	2 1/16	1.4	3.08	8	5/16
393320200	3	191	7 1/2	449	17 11/16	4	5/32	62.0	2 7/16	171	6 3/4	429	16 7/8	52.0	2 1/16	1.7	3.74	10	3/8
393420200	4	191	7 1/2	646	25 7/16	4	5/32	62.0	2 7/16	171	6 3/4	626	24 11/16	52.0	2 1/16	2.4	5.28	8	5/16
393440200	4R	195	7 11/16	708	27 7/8	4	5/32	62.0	2 7/16	175	6 7/8	688	27 1/16	52.0	2 1/16	2.4	5.28	8	5/16
393460200	4L	195	7 11/16	708	27 7/8	4	5/32	62.0	2 7/16	175	6 7/8	688	27 1/16	52.0	2 1/16	2.4	5.28	8	5/16
393520200	5	264	10 3/8	449	17 11/16	4	5/32	62.0	2 7/16	244	9 5/8	429	16 7/8	52.0	2 1/16	2.3	5.15	10	3/8
393780200	7RE	191	7 1/2	425	16 3/4	4	5/32	95.5	3 3/4	171	6 3/4	405	15 15/16	85.5	3 3/8	2.4	5.28	8	5/16


Maximum hull thickness 34mm
Minimum hull thickness 7mm

All portlights are supplied with 12 off M5 x 25 screws for hull thickness 17-25mm
Portlights should be fitted to a flat surface +/-1mm

Atlantic Portlight

The Atlantic Portlight has clean lines and a clear, acrylic window housed in an attractive aluminium frame

- Extensive range
- Flyscreens provided as standard
- Friction hinges
- Screw handles available as an option
- Full range of spare parts available on-line www.lewmar.com

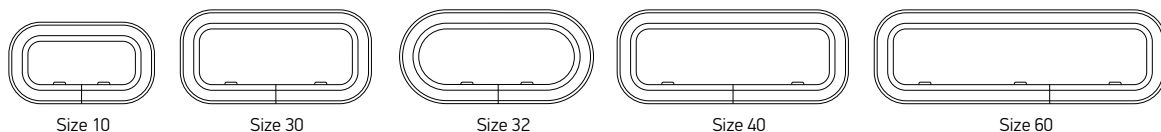

Specifications options:

- Clip handles standard / Screw handles optional
- Acrylic colour: Grey (standard) other colour optional
- Frame colour: Silver anodized (standard) other finish available
- Come complete with alloy valance and flyscreen
- Portlights and fixed lights come complete with fastenings as indicated in the table


Portlight Valance & Fastening

HULL THICKNESS MM	VALANCE TYPE	FASTENING	
8-10	Thin Hull Valance	360360999 ¹	M5 x 12mm Long
11-15	Thin Hull Valance	360361999	M5 x 16mm Long
16-19	Thick Hull Valance	360362999	M5 x 20mm Long
20-24	Thick Hull Valance	360363999 ²	M5 x 25mm Long


¹ Supplied as standard with thin hull valances
² Supplied as standard with thick hull valances

Fastenings supplied in bags of 100

Atlantic Portlight Dimensions

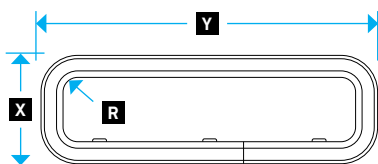

Atlantic Portlight Cut-out



PART NUMBER		OVERALL DIMENSIONS										CUT-OUT DIMENSIONS						PORTLIGHT WEIGHT		ACRYLIC WINDOW THICKNESS	
Thin Valance	Thick Valance	Size	X LENGTH		Y WIDTH		Z HEIGHT		R RADII		X1 LENGTH		Y1 WIDTH		R1 RADII		kg	lb	mm	in	
39110090	39110070	10	174	6 15/16	304	12	6	1/4	71	2 13/16	154	6 1/16	284	11 3/16	61	2 3/8	1.6	3.5	8	5/16	
39130090	39130070	30	200	7 7/8	400	15 3/4	6	1/4	71	2 13/16	180	7 1/16	380	14 15/16	61	2 3/8	2.2	4.8	8	5/16	
39132090	39132070	32	198	7 13/16	401	15 13/16	6	1/4	99	3 7/8	178	7	381	15	89	3 1/2	2.1	4.6	8	5/16	
39140090	39140070	40	200	7 7/8	480	18 7/8	6	1/4	71	2 13/16	180	7 1/16	460	18 1/8	61	2 3/8	2.5	5.5	8	5/16	
39160090	39160070	60	200	7 7/8	600	23 5/8	6	1/4	71	2 13/16	180	7 1/16	580	22 13/16	61	2 3/8	3.0	6.6	8	5/16	

Smoke grey acrylic and silver anodise frames
 Should be fitted to a flat surface with a max tolerance of ± 1mm
 Come complete with fastenings as indicated on above table

Portlight opening is restricted on very thick hulls.
 At 24mm hull thickness opening angle is 115°