

Synchro Blocks

Lewmar Synchro blocks are engineered for speed, efficiency and superior handling. We use a combination of scientifically optimised block geometry, a Free-Spin bearing and self-aligning head to reduce friction and increase efficiency by up to 40% over budget blocks on mainsheet systems.

Each component is perfectly synchronised with the movement of the rope, providing you with an easier, smoother transfer of power from deck to sail and less wear on your rope.


- Stainless steel strap for improved strength and longer service life
- Stiff glass fibre reinforced cheeks to prevent lines from wedging
- Innovative design with "tool-free" sliding swivel locking mechanism
- Simple switch to change from swivelling to fixed shackle

- A** Easy to use shackle post lock
- B** Shackle post – Fits travellers
- C** Lock mechanism enables 30° float
- D** Larger sheave diameter – Minimises rope friction
- E** High density free-spin bearing – reduces axle diameter for superior efficiency

Applications

Plain bearing blocks are typically used for heavy and static loads in:

- Halyard tuning
- Mainsheet systems
- Mast foot blocks
- Mast head blocks
- Boom vang

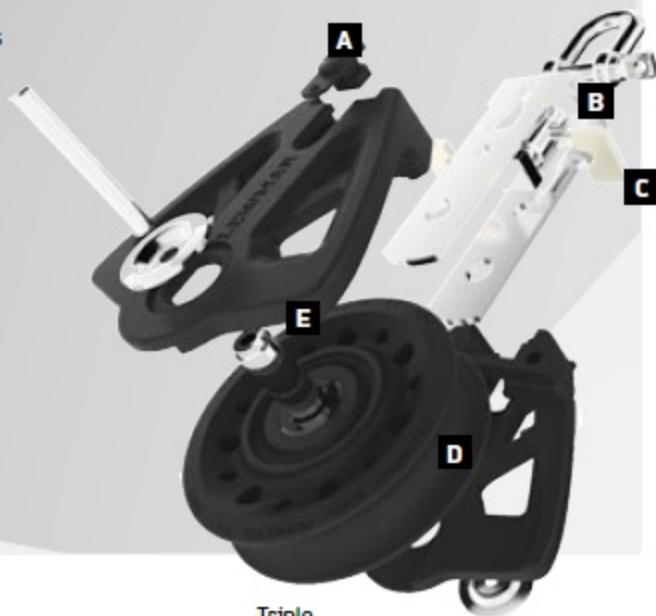

Single



PART NO	SHEAVE Ø	WORKING LOAD LIMIT		WEIGHT	
		Kg	lb	g	oz
29925001BK	50	450	990	67	2.36
29926001BK	60	800	1760	115	4.06
29927201BK	72	1100	2420	190	6.69
29929001BK	90	2000	4400	413	14.57

Double



PART NO	SHEAVE Ø	WORKING LOAD LIMIT		WEIGHT	
		Kg	lb	g	oz
29925002BK	50	450	990	142	5.01
29926002BK	60	800	1760	251	8.84
29927202BK	72	1100	2420	406	14.29
29929002BK	90	2000	4400	966	34.00

Triple



PART NO	SHEAVE Ø	WORKING LOAD LIMIT		WEIGHT	
		Kg	lb	g	oz
29925003BK	50	450	990	226	7.96
29926003BK	60	800	1760	371	13.06
29927203BK	72	1100	2420	618	21.75
29929003BK	90	2000	4400	1389	48.89