

Pilot Hatch

The Pilot Hatch is designed for use on the wheelhouse or cockpit canopy of a power craft, and the styling complements the Low Profile and Medium Profile Hatch Ranges.


- Opens up enclosed steering positions
- The handle never moves out of reach
- Operated with a single handlebar that rotates to seal down the hatch
- Can be secured with a 5cm opening when full ventilation is not required
- Sliding technology from Lewmar's racing hardware track systems, ensuring minimum friction
- The Pilot Hatch uses Lewmar's unique seal system for improved sealing and easy servicing
- Acrylic can be replaced without the use of sealant
- CE Approved



Maintenance
Acrylic or seal can be replaced by sliding the two halves of the frame apart.

Pilot Hatch Dimensions

Cut-out Dimensions

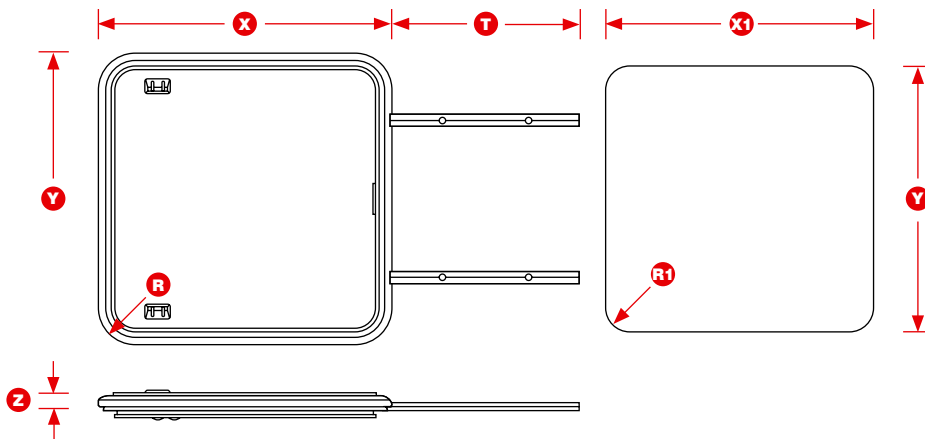

Pilot Hatch Specifications

PART NUMBER	SIZE	ACRYLIC COLOUR/TINT	LOWER FRAME FLANGE		OVERALL DIMENSIONS										CUT-OUT DIMENSIONS Change if Trimkits are used						ACRYLIC WINDOW THICKNESS			
					X		Y		Z		R		T		X1		Y1		R1					
			mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
30074000	60	Smoke Grey	15	5/8	581	22 7/8	577	22 11/16	29	1 1/8	72.5	2 7/8	373	14 5/8	507	19 15/16	507	19 15/16	42.5	1 11/16	10	3/8		
30069900	78	Smoke Grey	15	5/8	844	33 1/4	790	31 1/8	29	1 1/8	72.5	2 7/8	638	25 1/8	770	30 3/16	720	28 1/4	42.5	1 11/16	10	3/8		

Trim Kits are not available for size 78, normal Trim Kit fits size 60

Hatches should be fitted to a flat surface with a maximum tolerance of ± 1mm

The Pilot Hatch is only for use on wheel houses and cockpit canopies. It is not suitable for use on normal decks and coachroof applications

Fastening size for lower frame and sliding track use 5mm CSK screws No. 10 UNC 2BA

The pilot hatch cannot be operated from the outside