

Anchor Rodes

- Designed to complement the rope-chain gypsies fitted to all Lewmar windlasses
- Calibrated for even pitch
- Hot dip galvanised to minimise corrosion
- Welded for high strength
- Smooth rope-to-chain transition
- Helps your windlass operate smoothly
- Hand-sewn whipping guarantees against unravelling



Premium 3 Strand Rodes (USA only)

PART NUMBER	DESCRIPTION
69000331	5 ¼ G4 X 100 ½ with 5/16 shackle
69000332	10 ¼ G4 X 150 ½ with 5/16 shackle
69000334	15 ¼ G4 X 200 ½ with 5/16 shackle
69000335	15 ¼ G4 X 300 ½ with 5/16 shackle
69000339	20 5/16 G4 X 200 5/16 with 3/8 shackle

Premium 8 Plait Rodes (USA only)


PART NUMBER	DESCRIPTION
HM10HT200PX	10 ¼ G4 – 200 ½ 8PLT with Shackle – Sprint 600 & H-600
HM15HT300PX	15 ¼ G4 – 300 ½ 8PLT with Shackle – Sprint 600 & H-600
HM15H300PX	15 5/16 G4 – 300 5/8 8PLT with Shackle – H-900, (Concept 1, V-2&3 Use 001 gypsy)
HM30B130PX	30 5/16 BBB – 130 5/8 8PLT with Shackle – H-900 and (H-600 using 504 gypsy)
HM30B200PX	30 5/16 BBB – 200 5/8 8PLT with Shackle – H-900

Bow Rollers

- Friction-free surface to make dropping and weighing anchor easier
- Will not damage the deck or topsides
- Allows you to safely stow anchor while cruising and deploy at short notice
- Constructed of 304 stainless steel
- Range of rollers to fit the most common combinations of anchor, mounting style and boat
- Please visit lewmar.com for the full range of sizes and styles



Dimension Diagram

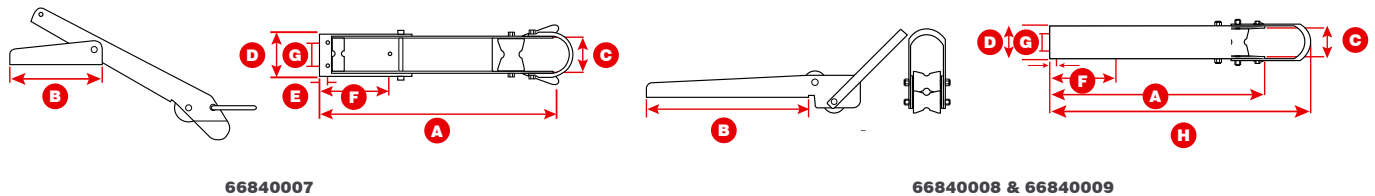

Bow Rollers Stainless Specification

PART NUMBER	WEIGHT		ANCHOR TYPE	A		B		C		D		E		F		G		H	
	kg	lb		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
66840007	3.6	8	Any Fluke style to 35lb/16kg	524	20	103	8	76	3	99	3 7/8	16	5/8	153	6	51	2	-	-
66840008	4	9	14, 22 & 35lb (7, 10 & 16kg) Delta® anchors	495	19 1/2	376	14 13/16	67	2 5/8	80	3 1/8	16	5/8	153	6	38	1 1/2	602	23 11/16
66840009	4.5	10	14, 22 & 35lb (7, 10 & 16kg) Delta® anchors*	597	23 1/2	478	18 13/16	67	2 5/8	80	3 1/8	16	5/8	153	6	38	1 1/2	704	27 11/16