

## Pro Installer ANL Fuse Holders

These ANL fuseholders offer unparalleled circuit protection choice for both the installer and end-user. The innovative Through-Panel fuseholder (778-ANLTP) provides superior access for fuse inspection and replacement. Small electrical loads are catered to with the compact 778-ANL unit while additional cable security and highest capacity is provided by the 778-ANL-2S, featuring additional studs for separate clamping of cables.

### Specifications:

- Cable connection studs: 8 mm (5/16") studs on 778-ANL, 10 mm (3/8") studs on 778-ANL-TP and 778-ANL-2S
- Fuse mounting studs: 8 mm (5/16")
- Double washers allow any ANL fuse brand to be fitted
- Fuse type: ANL or ANN (fast blow)
- Swinging fuse style allows changing fuse without removal of fastening nuts
- Amperage: determined by fuse sizing, 778-ANL: 35-300A, 778-ANL2S: 35-750A, 778-ANLTP, 35-500A
- 50V DC (or determined by fuse fitted)
- Tinned CDA102 copper conductors 778-ANL-2S
- Tinned CDA260 high conductivity brass conductors 778-ANLTP

Description	Part #	OEM #	Footprint*
Fuseholder, ANL	778-ANL	778-ANL-B	1 x
Fuseholder, ANL with additional cable clamping studs	778-ANL2S	778-ANL2S-B	1.5 x
ANL Through Panel	778-ANLTP	778-ANLTP-B	1 x

\* See page 51 for Footprint details

## Pro Installer Class-T Fuse Holders

Class-T fusing provides the ultimate protection for high power circuits, and where extremely fast fuse blow characteristics are required. Modern battery technologies such as Mastervolt Lithium Ion or AGM are capable of very high short circuit currents which may be beyond the interrupt rating of standard circuit breakers and other types of fuse. Two sizes of Pro Installer Class-T Fuseholder are available which accommodate fuses from 225-400 amps, and 450-600 amps respectively.

### Specifications:

- Cable connection studs: 10 mm (3/8") studs
- Fuse mounting studs: 10 mm (3/8") 225-400A holder, 12 mm (1/2") 450-600A holder
- Fuse type: Class-T (JLLN / TJN / A3T)
- Maximum amperage: Determined by fuse sizing, either 400A or 600A
- 50V DC
- High temperature, fiber reinforced plastic base provides strength and chemical resistance
- Clear polycarbonate cover
- Tinned CDA102 Copper conductors
- Stainless steel studs, washers and nuts for longevity in the marine environment
- Metric threads

Description	Part #	OEM #	Footprint*
Fuseholder, Class-T 225-400A	778-T2S-400	778-T2S-400-B	1.5 x
Fuseholder, Class-T 450-600A	778-T2S-600	778-T2S-600-B	1.5 x

\* See page 51 for Footprint details



Find out more. Watch the video.


### Related Products



Pro Installer Link Bars page 55



ANL Fuses page 64

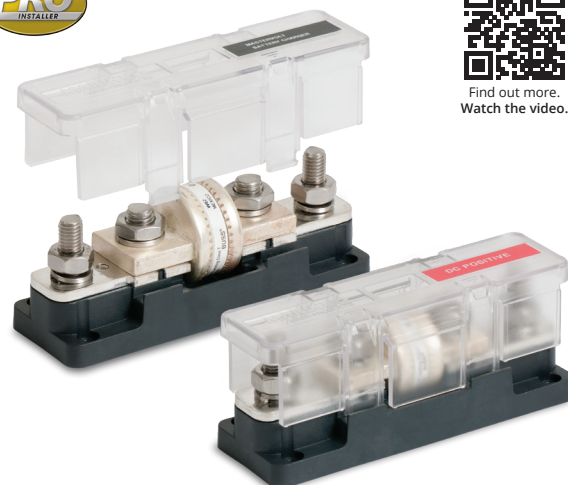

Find out more. Watch the video.

### Related Products



Pro Installer Link Bars page 55



Class T Fuses page 64